

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10/534684



(43) International Publication Date
27 May 2004 (27.05.2004)


PCT

(10) International Publication Number
WO 2004/044437 A1

- (51) International Patent Classification⁷: F15B 15/14, 20/00, 21/04
- (21) International Application Number: PCT/NO2003/000380
- (22) International Filing Date: 11 November 2003 (11.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 20025408 12 November 2002 (12.11.2002) NO
- (71) Applicant (for all designated States except US): NATIONAL OILWELL NORWAY AS [NO/NO]; P.O. Box 8181, N-4069 Stavanger (NO).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): MOE, Magne, Mathias [NO/NO]; Osen 13, N-9414 Harstad (NO).
- (74) Agent: HÅMSØ PATENTBYRÅ ANS; P.O. Box 171, N-4302 Sandnes (NO).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT (utility model), PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: DRAINING OF OIL LEAK IN A HYDRAULIC CYLINDER

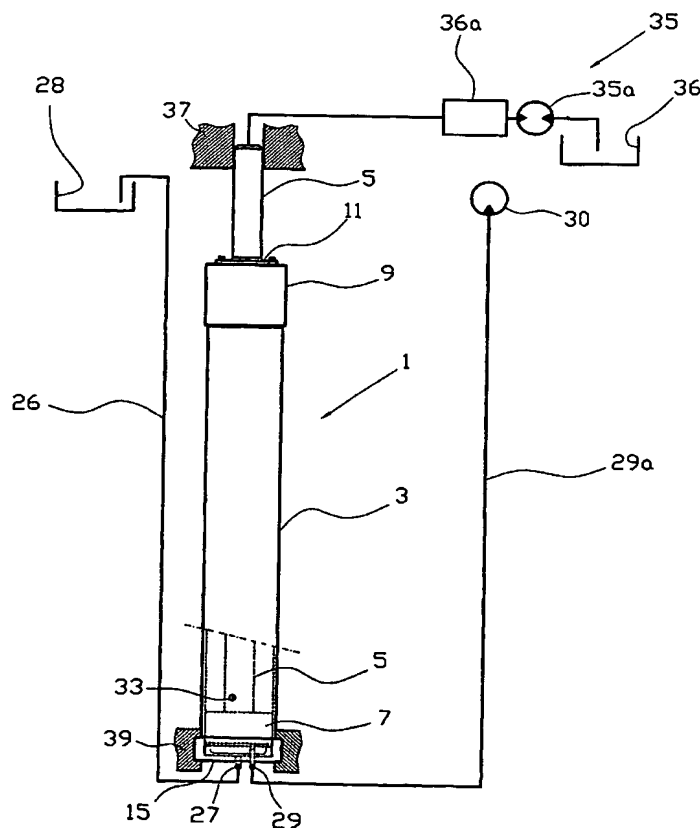

(57) Abstract: A device for a single-acting hydraulic cylinder (1) designed to lift or pull a load upon the existence of an oil pressure on the rod-side of a cylinder piston (7), where the cylinder bottom (15) of the hydraulic cylinder (1) is provided with a drainage outlet (27) for leakage fluid, as well as an air inlet (29).

WO 2004/044437 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

DRAINING OF OIL LEAK IN A HYDRAULIC CYLINDER

This invention regards a device for draining an oil leakage between a piston and a cylinder wall in a hydraulic cylinder, in particular in a single-acting vertical cylinder designed to pull a load through the action of hydraulic pressure, and where the lead-through for the piston rod is located at the upper end of the cylinder.

Hydraulic cylinders that operate more or less continuously, while at the same time being installed in an inaccessible location as regards daily inspections and in surroundings where oil leak is undesirable for environmental reasons, e.g. cylinders used to maintain the prescribed tension in a riser between a subsea borehole for petroleum production and a floating platform, are expensive to maintain when all safety regulations and pollution requirements are to be complied with. Frequent operation calls for extensive maintenance, while inaccessible placement results in complicated operations to gain access to the components, and maintenance will often cause a stoppage in the ordinary production in the plant.

With a functional system for drainage and collection of oil leaking from the cylinders, a greater leakage can be tolerated before the cylinders must be serviced. A longer maintenance interval means a great potential for financial profit. In addition, a secure method of collecting leaked oil will entail environmental profits.

The object of the invention is to remedy the disadvantages of prior art.

The object is achieved by the characteristics stated in the description below and in the following claims.

A single-acting, vertically mounted hydraulic cylinder of a type that is known *per se* has a protruding cylinder rod at the upper end of the cylinder. The piston rod is provided with a piston according to prior art. The piston rod lead-through through the gable wall of the cylinder, and the piston, are provided with suitable seals according to prior art.

Advantageously, the cylinder is supplied with oil through an axial cylindrical passage disposed centrally in the piston rod.

The cylinder is designed to lift a load when connected to a hydraulic system that is known *per se* and when hydraulic pressure is established in a space above a piston in the cylinder.

A bottom plate that fits tightly at a lower end of the cylinder is provided with a drainage channel. The drainage

channel is connected, by means of techniques that are known *per se*, with a reservoir for collection of oil that is drained from a space between the cylinder piston and the bottom of the cylinder.

The bottom of the cylinder is provided with a shoulder for the piston, so as to leave a space between the piston and the cylinder bottom when the piston is pushed fully into the cylinder.

The bottom plate of the cylinder is provided with an air inlet that projects slightly from the bottom, at the most to the level of the piston shoulder in the cylinder bottom. The air inlet is connected, by means of techniques that are known *per se*, with a compressed-air plant that is known *per se*.

When using the cylinder of the invention, hydraulic pressure is introduced at the top of the cylinder piston. Over time, oil will leak between the cylinder wall and the piston seals. The leaking oil collects at the bottom of the cylinder, from where it is drained via said drainage channel. By using said compressed-air plant, the space between the piston and the cylinder bottom is pressurized to a slight overpressure, typically 1.5 bar. As a result of this overpressure the leaking oil will drain to a reservoir which may be placed in a, for this, favourable location high above the cylinder, e.g. on a deck of an oil installation.

The following describes a non-limiting example of a preferred embodiment illustrated in the accompanying drawings, in which:

Figure 1 schematically shows a cylinder according to the invention with an associated compressed-air plant and a reservoir for leaking oil; and

Figure 2 is a longitudinal section through the lower part of the cylinder on a larger scale.

In the drawings, reference number 1 denotes a hydraulic cylinder in which 3 is a cylinder wall, 5 is a piston rod and 7 is a piston. The hydraulic cylinder 1 also comprises a cylinder gable 9 with associated seals 11. The piston 7 is provided with seals 13. The piston 7 divides the cylinder 1 into an upper space 7a on the rod-side of the piston 7 and a lower space 7b.

A cylinder bottom 15 is screwed onto a lower end 19 of the cylinder 1 by means of female threads 17. An annular piston shoulder 21 is placed on an inner wall surface 16 of the cylinder bottom 15. The piston shoulder 21 is provided with seals 23 and fixed to the bottom plate 15 by screws 25. The bottom plate 15 is provided with a drainage channel 27 and an air inlet 29. The air inlet 29 projects above the inner wall surface 16 of the bottom plate 15 at a height of approximately $\frac{2}{3}$ of the height of the piston shoulder 21. The drainage channel 27 is connected with a reservoir 28 via suitable tubes 26. The air inlet 29 is connected with a compressed-air plant 30 via suitable tubes 29a.

The piston rod 5 has an axial, central passage 31 that connects the cylinder 1 with a hydraulic system 35 via bores 33, which hydraulic system comprises a pump 35a, a reservoir 36 and control device 36a.

The cylinder 1 is connected to a supporting structure 37 and a movable cast 39.

The hydraulic system 35 is designed to pressurize the upper cylinder space 7a, so that the cylinder 1 supports or moves the load 39 to which it is connected. The seals 13 are subjected to oil pressure. Any oil leak past the seals 13 pass the piston 7 and is collected at the bottom plate 15 of the cylinder 1. The space 7b below the piston 7 is connected to the compressed-air plant 30, which maintains a prescribed pressure, preferably between 1 and 2 bar. By means of said overpressure, any leaking oil that occurs in the lower cylinder space 7b is forced through channel 27 and tube 26 and up to the reservoir 28, in which the oil is collected, possibly to be sent back to the reservoir 36 of the hydraulic system 35.

C l a i m s

1. A device for a single-acting hydraulic cylinder (1) designed to lift or pull a load upon the existence of an oil pressure on the rod-side of a cylinder piston (7), characterized in that the cylinder bottom (15) of the hydraulic cylinder (1) is provided with a drainage outlet (27) for leaking fluid, as well as an air inlet (29).
2. A device in accordance with Claim 1, characterized in that the drainage outlet (27) is connected to a reservoir (28) for collection of leakage fluid.
3. A device in accordance with Claim 2, characterized in that the reservoir (28) in the position of use is placed at a higher level than the bottom (15) of the cylinder.
4. A device in accordance with Claim 1, characterized in that the air inlet (29) projects above the inner wall surface (16) of the cylinder bottom (15).
5. A device in accordance with Claim 1, characterized in that the air inlet (29) is connected with a compressed-air reservoir (30) designed to continuously or periodically apply an overpressure to the lower cylinder space (7b).

6. A device in accordance with one or more of the preceding claims, c h a r a c t e r i z e d i n that the piston shoulder (21) forms a hollow space (21b) when the cylinder piston (7) is in the lower position.

1/2

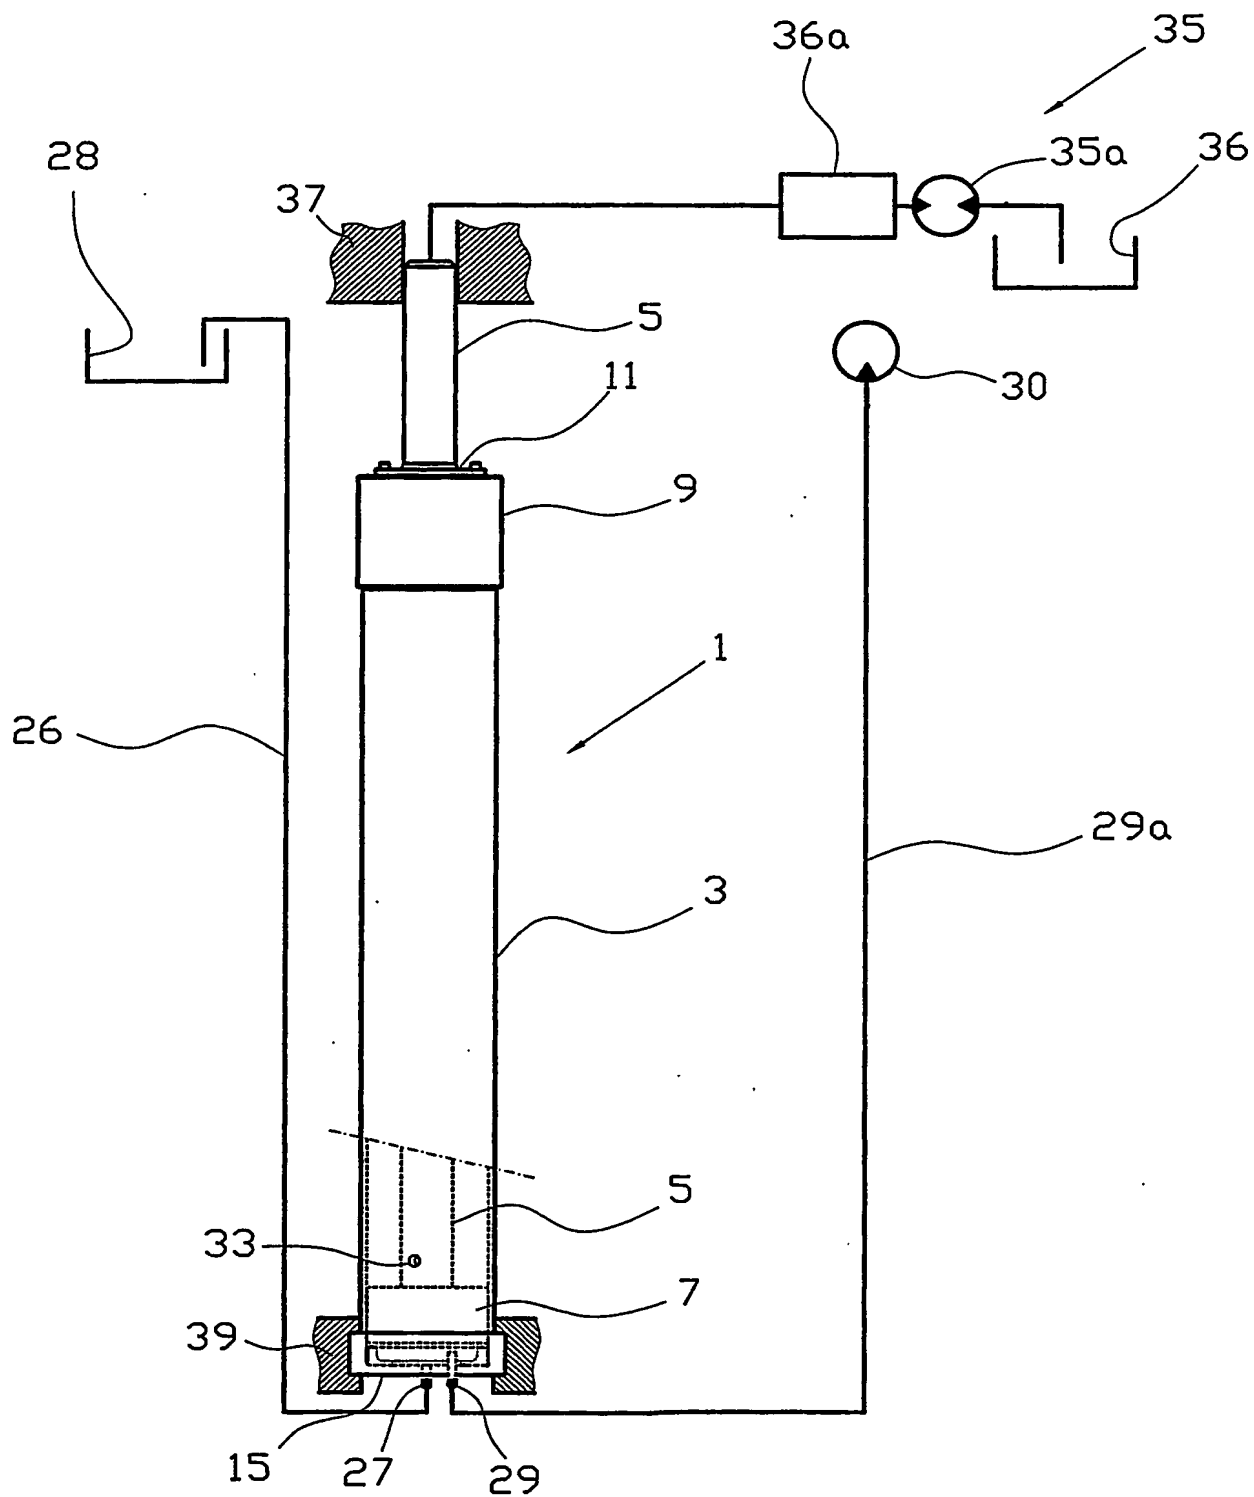


Fig. 1

2/2

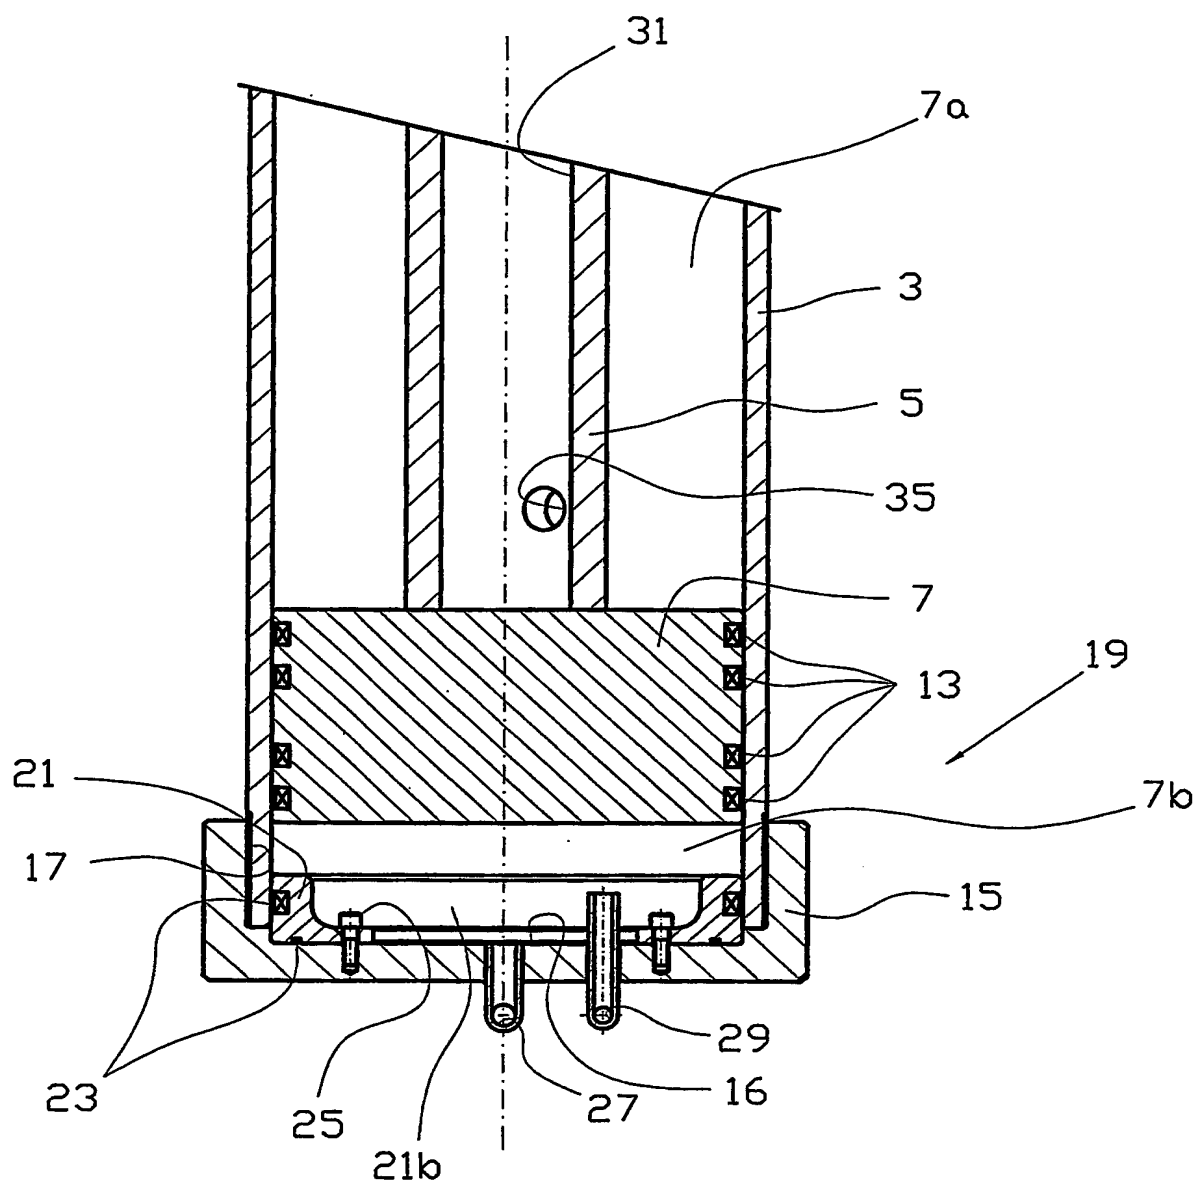


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 2003/000380

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: F15B 15/14, F15B 20/00, F15B 21/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: F15B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3986437 A (LIOUX), 19 October 1976 (19.10.1976), column 3, line 63 - line 68, figures 3-5 --	1-6
A	DE 4133188 A1 (ZAHNRADFABRIK FRIEDRICHSHAFEN AG), 9 April 1992 (09.04.1992), figures 1,2, abstract --	1-6
A	DE 10134155 A1 (SEARS MFG. CO.), 31 January 2002 (31.01.2002), column 2, line 9 - line 40, figures 1-4 --	1-6
A	US 3293994 A (P.E. NAPOLITANO), 27 December 1966 (27.12.1966), figures 1,2, claim 1 --	1-6

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 February 2004

Date of mailing of the international search report

09-02-2004

Name and mailing address of the ISA/

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Lena Nilsson / JA A

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 2003/000380

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5031509 A (COWAN), 16 July 1991 (16.07.1991), figure 1, abstract --	1-6
A	US 6374723 B1 (COOK ET AL), 23 April 2002 (23.04.2002), figure 2, abstract -- -----	1-6

INTERNATIONAL SEARCH REPORT
Information on patent family members

24/12/2003

International application No.

PCT/NO 2003/000380

US	3986437	A	19/10/1976	DE	2419808	A	05/12/1974
				FR	2227450	A,B	22/11/1974
				GB	1458058	A	08/12/1976
				IT	1007874	B	30/10/1976
				JP	50014062	A	14/02/1975
DE	4133188	A1	09/04/1992	NONE			
DE	10134155	A1	31/01/2002	GB	0113351	D	00/00/0000
				GB	2365073	A	13/02/2002
US	3293994	A	27/12/1966	NONE			
US	5031509	A	16/07/1991	AT	89647	T	15/06/1993
				CA	1327741	A,C	15/03/1994
				DE	68906581	D,T	07/10/1993
				EP	0334655	A,B	27/09/1989
				JP	1294973	A	28/11/1989
US	6374723	B1	23/04/2002	NONE			